


# WEMOS Lolin32

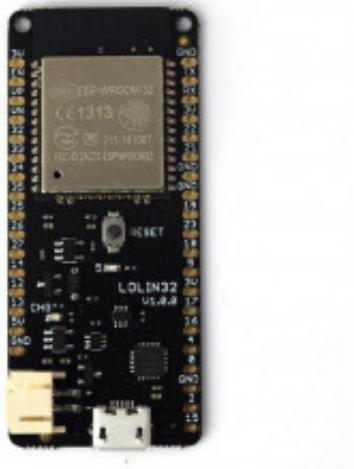

**Produktkode:** 2005

**Tilgjengelighet:** 4

**Custom Field 5 (Location):** N 11

**Pris: kr. 130,00**

## Short Description


4 MB Flash WEMOS Lolin32 CP2104 WIFI & Bluetooth Card Based ESP-32 ESP-WROOM-32

## Beskrivelse

- Processors:
  - CPU: Xtensa dual-core (or single-core) 32-bit LX6 microprocessor, operating at 160 or 240 MHz and performing at up to 600 [DMIPS](#)
  - Ultra low power (ULP) co-processor
- Memory: 520 KiB SRAM
- Wireless connectivity:
  - Wi-Fi: [802.11](#) b/g/n
  - Bluetooth: v4.2 BR/EDR and BLE (shares the radio with Wi-Fi)
- Peripheral interfaces:
  - 12-bit [SAR ADC](#) up to 18 channels
  - 2 × 8-bit [DACs](#)
  - 10 × touch sensors ([capacitive sensing](#) GPIOs)
  - 4 × [SPI](#)
  - 2 × [I<sup>2</sup>S](#) interfaces
  - 2 × [I<sup>2</sup>C](#) interfaces
  - 3 × [UART](#)
  - [SD/SDIO/CE-ATA/MMC/eMMC](#) host controller
  - SDIO/SPI slave controller

- [Ethernet](#) MAC interface with dedicated DMA and [IEEE 1588 Precision Time Protocol](#) support
- [CAN bus](#) 2.0
- Infrared remote controller (TX/RX, up to 8 channels)
- Motor [PWM](#)
- LED [PWM](#) (up to 16 channels)
- [Hall effect sensor](#)
- Ultra low power analog pre-amplifier
- Security:
  - IEEE 802.11 standard security features all supported, including WFA, WPA/WPA2 and [WAPI](#)
  - Secure boot
  - Flash encryption
  - 1024-bit OTP, up to 768-bit for customers
  - Cryptographic hardware acceleration: [AES](#), [SHA-2](#), [RSA](#), [elliptic curve cryptography](#) (ECC), [random number generator](#) (RNG)
- Power management:
  - Internal [low-dropout regulator](#)
  - Individual power domain for RTC
  - 5?A deep sleep current
  - Wake up from GPIO interrupt, timer, ADC measurements, capacitive touch sensor interrupt
- **Battery management**
  - Connector for 3.7v battery (like 18650).

## Pinout

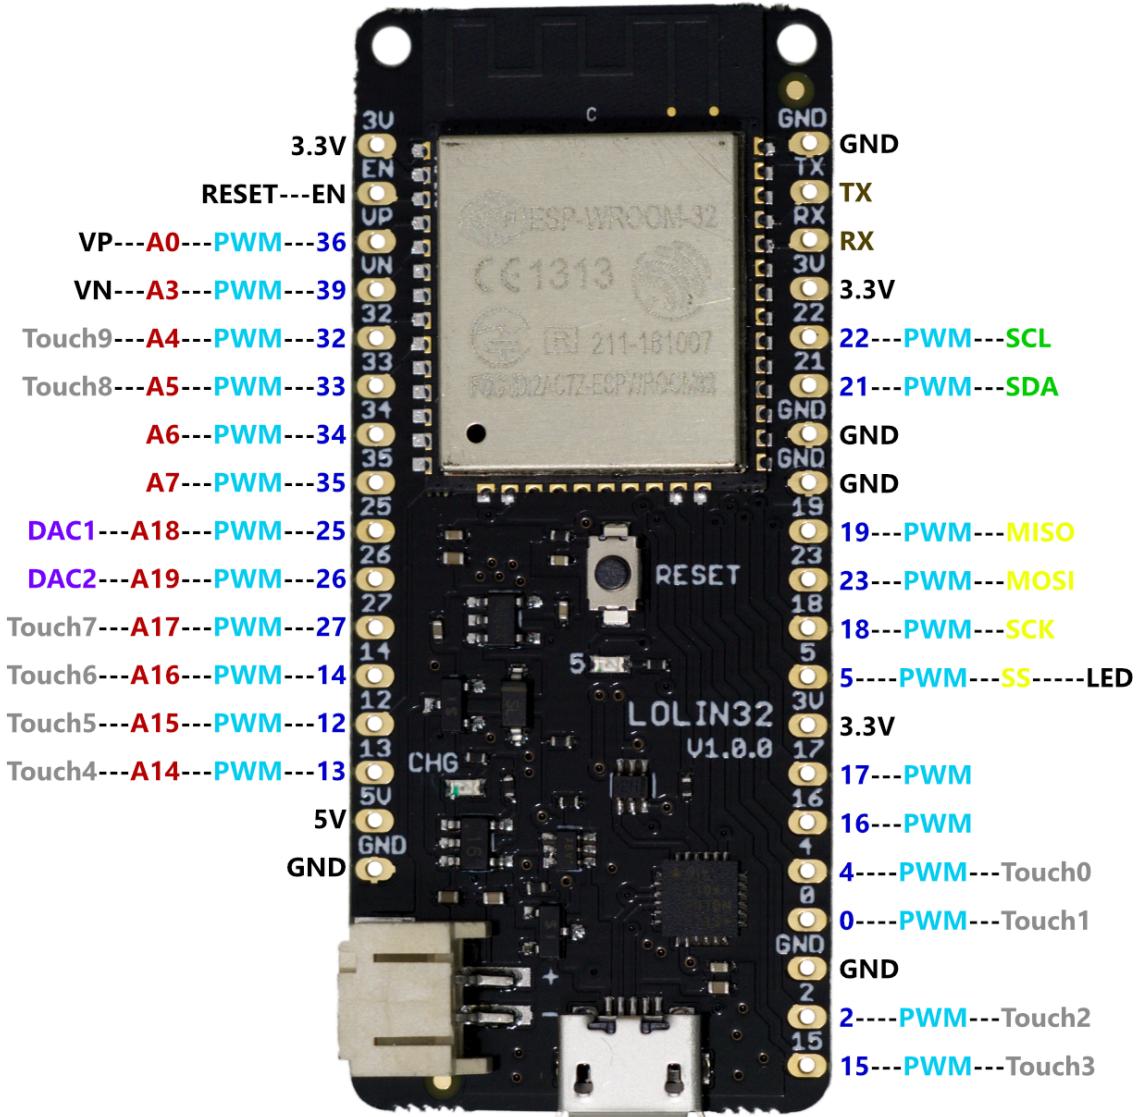

**DAC**    **Digital**    **Analog**    **Power**  
**Serial**    **SPI**    **I2C**    **PWM**    **Touch**

## Erfaringsavvik

- Analoge inputs forstyrres når WiFi er aktiv. Gjelder portene 0,

2,4,12,13,14,15,25,26,27.

- Analoge inputs er ustabile.

Serieporter: <https://circuits4you.com/2018/12/31/esp32-hardware-serial2-example/>

UART	RX IO	TX IO	CTS	RTS
UART0	GPIO3	GPIO1	N/A	N/A
UART1	GPIO9	GPIO10	GPIO6	GPIO11
UART2	GPIO16	GPIO17	GPIO8	GPIO7

## Prosjekter

[Kontroll batteri bobil](#)

## Product Gallery

