

4PIN 5V Relay SIP-1A05 Reed Switch Relay



Produktkode: 188
Tilgjengelighet: 4
Custom Field 5 (Location): AA16

Pris: kr. 25,00

Short Description

4PIN 5V Relay SIP-1A05 Reed Switch Relay For PAN CHANG RelayLDUKH*wk

Beskrivelse

Description:

Name Dry Reed Relay

Model SIP-1A05

Voltage DC 5V

Current 1A

DC resistance 450~550ohm

Contact Open style

Body Size 1.9 x 0.7 x 0.5cm/0.75" x 0.28" x 0.2"(L*W*T)

Pin Number 4

Net Weight 3g

Package Included:

5 x 5V Relay SIP-1A05 Reed Switch Relay for PAN CHANG Relay 4PIN New

Parameter	Min	Nom	Max	Unit
Switching Voltage			100	Volts
Switching current			0.5	Amps
Carry current			1	Amps
Switching frequency			500	Hz
Contact resistance			150	mΩ

(See detailed specifications for more information.)

SPECIFICATIONS

Dry Reed Relay Specifications

All parameters at 20°C unless otherwise stated.

Operate voltage, release voltage, and coil resistance will vary by approximately 0.4%/°C as ambient temperature varies.

PARAMETER	CONDITIONS	MIN	Nom	MAX	UNITS
Contact Ratings					
Switching Voltage (开关电压)	Max DC/PeakAC Resistive	-	-	100	Volts
Switching Current (开关电流)	Max DC/PeakAC Resistive	-	-	0.5	Amps
Carry Current (负载电流)	Max DC/PeakAC Resistive	-	-	1	Amps
Contact Rating (额定容量)	Max DC/PeakAC Resistive	-	-	10	Watts
Life Expectancy (寿命)	Signal Level 12V 10mA Rated Loads	-	200	-	x10 ⁶ Ops
Static Contact Resistance (动态电阻)	50mV,10mA	-	120	150	mΩ
		-	-	-	-
Relay Specifications					
Insulation Resistance (绝缘电阻)	Between all isolated pins At 100V,20°C,40%RH	10 ¹⁰	-	-	Ω
Capacitance (电容量)	Across Open Contacts	-	-	1	pF
Open Contact to Coil (耐压)		-	-	2	pF
Dielectric Strength	Between Contacts	250	-	-	VDC/Peak AC
	Contacts to Coil	1400	-	-	VDC/Peak AC
Operate Time (动作时间)	At Nominal Coil Voltage	-	0.3	0.5	ms
Including bounce	10Hz Square Wave	-	-	-	-
Release Time		-	0.3	0.5	-
Environmental Ratings (环境温度)					
Storage Temperature	T	-40	-	+105	°C
Operating Temperature	T	-40	-	+85	°C
Soldering Temperature	Applied to pins,10 sec.max.	-	-	+260	°C
Vibration Resistance (振动)	20g,10Hz-2000Hz	-	-	20	Gs
(Survival)		-	-	-	-
Shock Resistance (冲击)	100g,11+/-ms,1/2 Sine Wave	-	-	-	-
(Survival)		-	-	-	-
Weight		-	1.6	-	grams

Pinout

SIP-1A05 REED RELAY

COIL SPECIFICATIONS


Contact F	Coil Voltage			Coil Resistance			Operate Voltage			Release Voltage			Min Input Power		
	Volts						Volts			Volts			Mw		
				10% (20 °C)			Must operate by (20 °C)			Must release by (20 °C)					
	Min	Nom	Max	Min	Nom	Max	Min	Nom	Max	Min	Nom	Max	Min	Nom	Max
1-Form-A		5	15	450	500	550			3.75	0.6				50	

MECHANICAL DIMENSIONS

Mechanical Dimensions:

All dimensions are measured in millimeters

SIP Form A

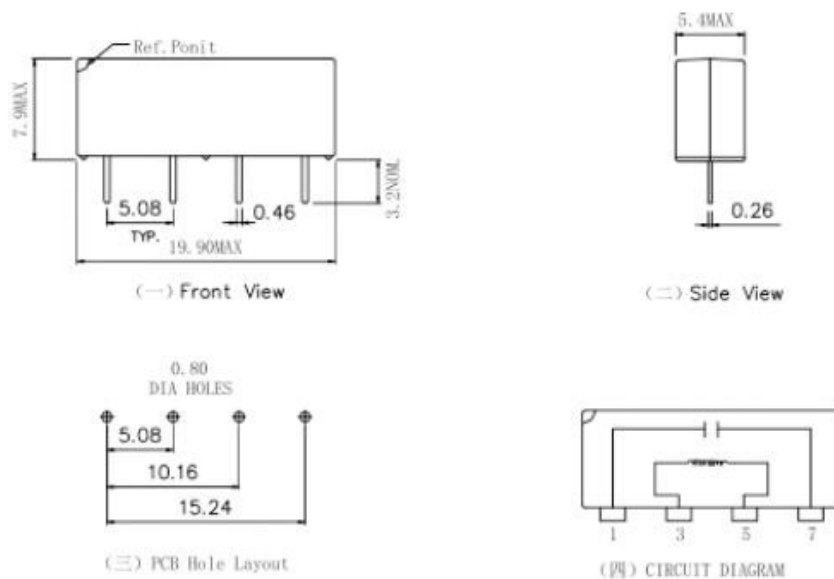

Product Gallery



SIP-1A05 REED RELAY

COIL SPECIFICATIONS

Parameter	Coil Voltage (Vdc)			Coil Resistance (Ω)			Operate Voltage (Vdc)			Release Voltage (Vdc)			Control Signal Power (W)
	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Voltage	5	15	40	200	200	200	Must operate by 0V (C)	Must operate by 0V (C)	Must release by 0V (C)	Must release by 0V (C)	Must release by 0V (C)	Must release by 0V (C)	

MECHANICAL DIMENSIONS

Mechanical Dimensions:
 All dimensions are measured in millimeters.
 SIP form 1.

