

USB 3.1 Connector Type-C 2Pin 2 Welding Wire Female



Produktkode: 2364

Tilgjengelighet: 10


Pris: kr. 35,00

Short Description

USB 3.1 Connector Type-C 2Pin 2 Welding Wire Female Waterproof Female Socket With Screw Hole Rubber Ring Fast Charging Port

Beskrivelse

TYPE-C 2P




INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			WUS						WUS		GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1



PIN ASSIGNMENT

PIN NO.	A12	B11	A4	B4
SIGNAL NAME	GND	VBUS		
PCB PAD NO.	C1	C2		

电子线焊接

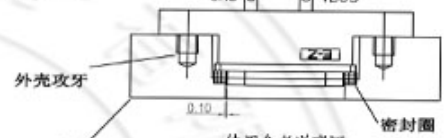

使用参考说明图
无需PCB板,可直接焊线



NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100V
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM
- INSULATION RESISTANCE: 100 MEGOHM
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY:5000 CYCLES

5	Shell2	1	SUS304 Ni Plating T=0.20mm	N40-320μ'	X ₁ ± 0.50	X' ± 0.2*	UNETS			
4	Shell1	1	SUS304 Ni Plating T=0.3mm	N40-320μ'	X ± 0.30	X' ± 1*	mm			
3	Housing2	1	LCP(G.F30%)		XX ± 0.10	XX' ± 0.5*	MAT'L	PART NO.	TITLE:	2PIN TYPE
2	Contact	4	Phosphor bronze CS210R-EH Au/Ni Plating T=0.20mm	N40-350μ'	XXX ± 0.05			FINISH	APPD: RADEN	3WG NO:
1	Housing	1	PA6T (G.F30%)	AU CONTACT AREA/ OTHER AREA/CUT				CHKD: MARC		
ITEM	PARTNAME	Q'TY	FINISH	NOTE			Q'TY	DR: HAJY 2021/02/02	SCALE	1/1